




Stadox

Reaktiv-Haftprimer

Etching Adhesion Primer

- **Transparent 2K acid primer**
- **Excellent adhesion**
- **Chromate-free**
- **For 3-stage systems**
- **Outstanding corrosion protection**

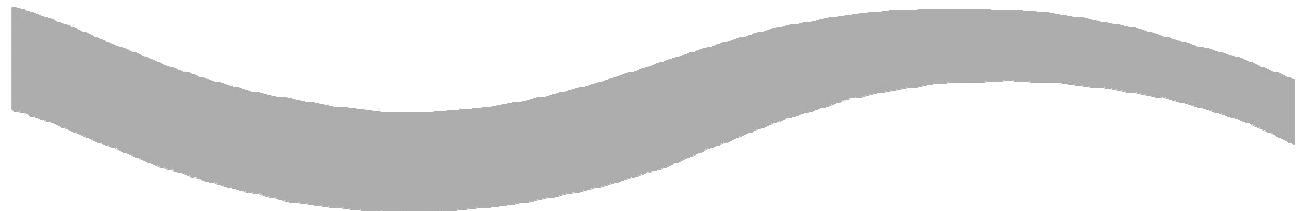

Technical Description:

- Mix 1:1 with Stadox Etching Adhesion Activator
- Potlife 8h / 18-22°C
- 2 spray passes = 8 micron
- Flash off 30 min / 18-22°C

Stadox Reaktiv-Haftprimer

Substrate:

- Bare metal, sanded
- Aluminium, sanded
- Galvanised metal, sanded
- Through-hardened sanded paintwork

Pretreatment / Cleaning:




For substrate preparation information see Stadox Painting System S1.



Use air fed respirator. Refer to relevant Health and Safety Data Sheets.

Application:




1:1 with
Stadox Etching Adhesion Activator
Potlife 8-10 h / 18-22°C



Compliant 1.3 - 1.4 mm
2.0 - 2.5 bar inlet pressure
2 = 8 - 10 micron



HVLP 1.3 - 1.6 mm
0.7 bar atomization pressure
2 = 8 - 10 micron



30 min / 18-22°C



Stadox VOC / 2K Filler

Stadox Reaktiv-Haftprimer

Flash point:

- 24°C / 75.2°F

Specific Gravity:

- 0.98 g/cm³

Solid Content

(without thinner added):

- 29.2 Weight %
- 16.7 Volume %

VOC (2004/42/EC):

2004/42/II B(c)(780)780

The EU limit value for this product (productcategory II B.c) in ready to use form is max 780 g/l VOC. The VOC content of this product in ready for use form is max. 780 g/l.

Theoretical

Coverage:

- 9,9 m²/l at 8 micron dry film thickness

Cleaning of equipment:

Clean after use with Stadox Cleaning Thinner.

Important remarks:

- Stadox Etching Adhesion Primer must be applied in combination with Stadox VOC / 2K Filler in a 3-stage system.
- Do not overcoat with PE, EP, Standohyd and Standoblue products.

For professional use only. The information provided in this documentation has been carefully selected and arranged by us. It is based upon our best knowledge on the subject at the date of issuance. The Information is given for information purposes only. We are not liable for its correctness, accuracy and completeness. It is up to the user to check the information with regard to up-to-dateness and suitability for his intended purpose. The intellectual property in this Information, including patents, trademarks and copyrights, is protected. All rights reserved. The relevant Material Safety Data Sheet and Warnings displayed on the product label need to be observed. We may modify and/ or discontinue operation of all or portions of this Information at any time in our sole discretion, without notice and assume no responsibility to update the Information. All rules set forth in this clause shall apply accordingly for any future changes and amendments.